

Modular Design Systems


modulardesign@yahoo.com

Speaker Delay and DC Protection

29 Jul 2022

Product Overview

Best in class provides 500ms speaker delay for soft start of your amplifier. Works hand in hand with power supply soft start that powers up your amplifier within 200ms. DC protection for your speakers. 40 Amps Max. Can operate externally.

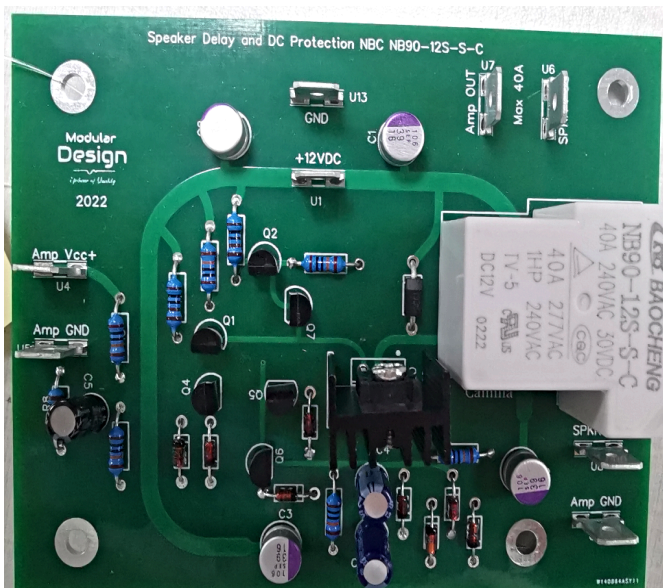

Dimensions

100mm * 76.4mm.

Power Source

Regulated 12VDC power supply required to power the module.

Mounting


The module has holes for mounting. A M3 insulated standoff is suitable for attachment. This module is to be mounted inside the amplifier.

Details


12VDC power supply required to power the module.

Below are connection diagrams

Protection used internally for normal single amplifier channel

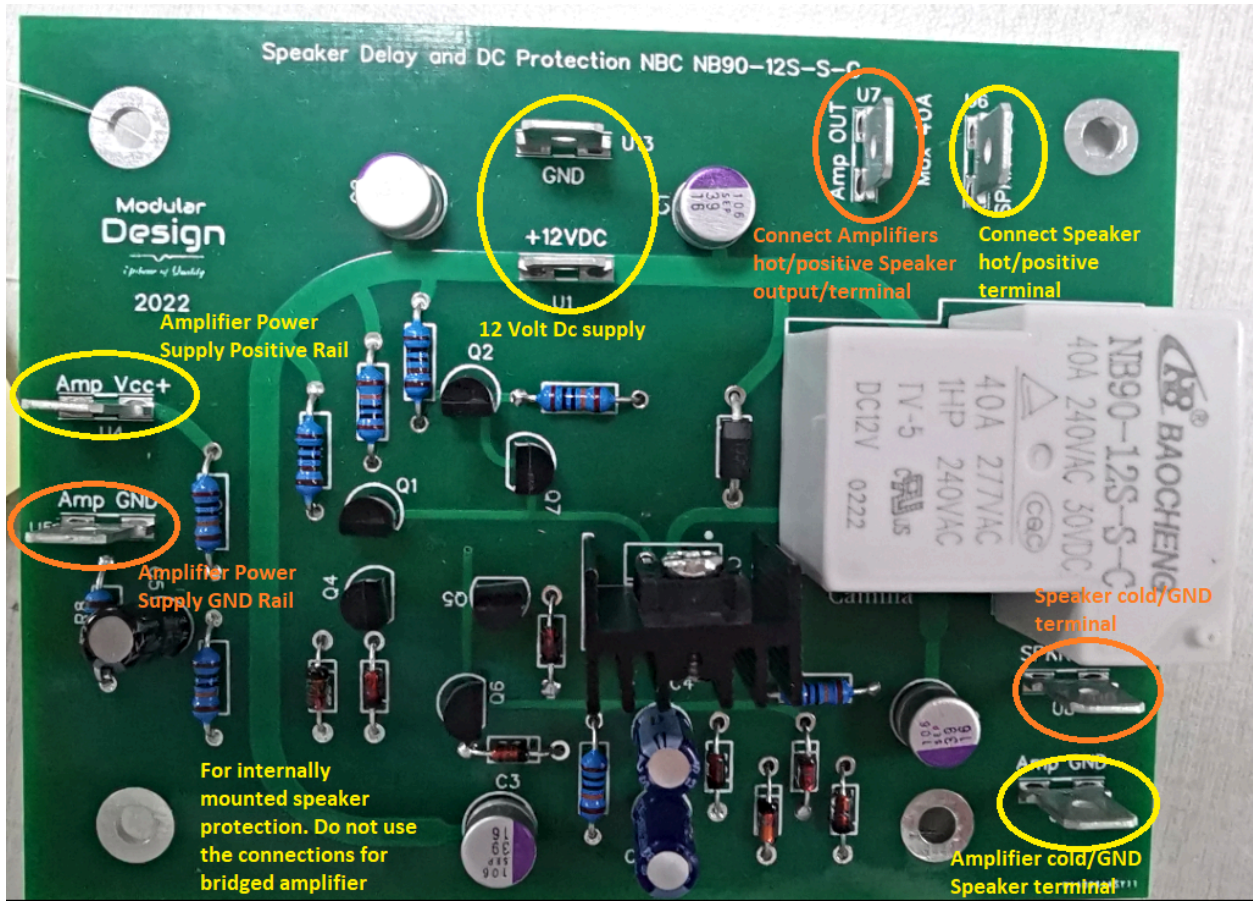

Protection used for bridged or symmetrical amplifier channel

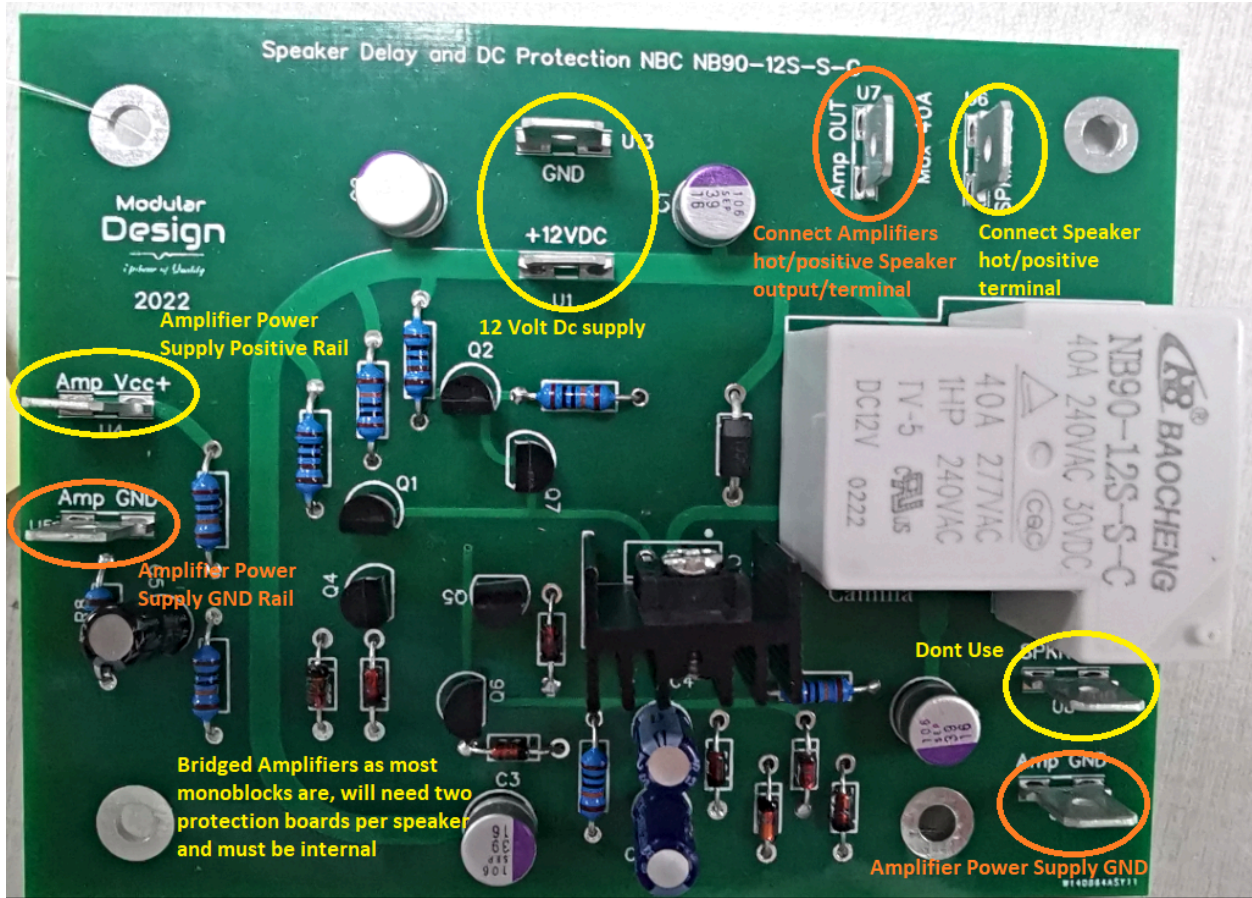

Protection for external use

